

FLEXmax 100 AFCI™

300V MPPT Charge Controller




- 100A output for up to 6kW of charging
- Updated MPPT software algorithm improves energy harvest vs other controllers
- 300VDC open-circuit voltage limit enables 2-string configuration to minimize BOS
- Programmable auxiliary control output for smart load controls
- Standard 5 year warranty upgraded to 7,000W of nameplate solar power at 48V
- Integrated arc fault circuit detection and interruption for optimized systems
- CEC weighted efficiency greater than 97%

The FLEXmax 100 from OutBack Power™ is the most advanced MPPT charge controller technology and power solution.

Designed with 15 years of experience manufacturing products for fault intolerant, mission-critical applications, OutBack Power's FLEXmax 100 delivers a high quality and reliable MPPT charge controller. The FLEXmax 100 has passed extensive quality and reliability testing, including Highly Accelerated Life Testing (HALT).

The compact, outdoor-rated enclosure keeps dust and moisture from damaging internal components. With the addition of arc and ground fault protection and rapid shutdown capacitor discharge, the FLEXmax 100 is the most versatile high power MPPT controller on the market. Configuring the FLEXmax 100 in your system is easy with 128 days of built-in data storage, smart programming wizards (MATE3s required) and connectivity with OPTICS RE™, so you can monitor, command and control from one location.



The FLEXmax 100 charges your batteries faster. This allows you to sell energy to the grid faster, and maximize your return on investment. The FLEXmax 100 has the best price to power ratio on the market.

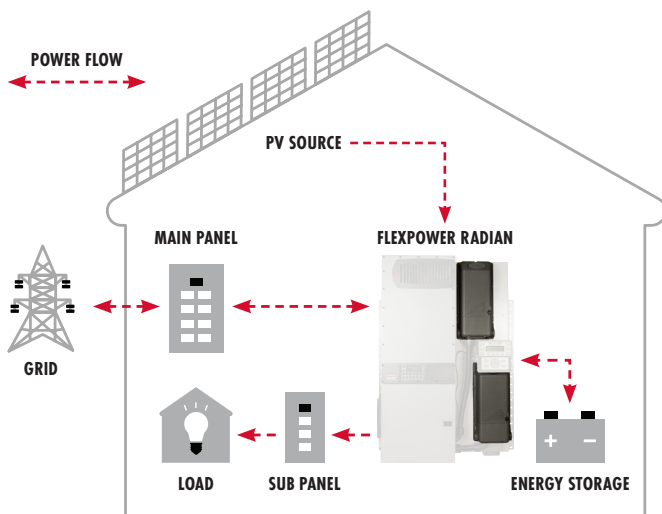

FLEXmax 100 AFCI Specifications

Model:	FLEXmax 100 AFCI
Nominal Battery System Voltage:	24VDC / 36VDC / 48VDC
Maximum Continuous Output Current:	100A
Maximum Input Current (Short-Circuit):	64A
Maximum Array (STC Nameplate):	3500W / 5250W / 7000W (charging output limited to 100A at battery voltage)
Maximum PV System Voltage:	300VDC
Operating Input Voltage Range:	30 to 290VDC
Standby Power Consumption:	~2.5W
Power Conversion Efficiency:	24V: 96% 48V: 97%
Peak Efficiency:	24V: 97.5% 48V: 98.8%
CEC Weighted Efficiency:	48V: 97.3%
Charging Regulation:	Three-stage
Voltage Regulation Set Points:	Absorption, float and equalization
Low Power Consumption Mode:	Yes, configurable to maximize energy savings based on voltage, time, and current limits
Equalization Charging:	Programmable time intervals, voltage set point and duration, automatic termination when completed
Battery Temperature Compensation:	Adjustable from 2mV/cell/°C to 6mV/cell/°C
Voltage Step-Down Capability:	Down convert from any acceptable array voltage to any battery voltage (example: 72VDC array to 24VDC battery)
Programmable Auxiliary Control Output:	12VDC output signal which can be programmed for different control applications (maximum of 0.25ADC)
Status Display:	LED indicators
Remote Display and Controller:	MATE3s compatible
Network Cabling:	Proprietary network system using RJ-45 modular connectors
Data Logging:	128 days
Operating Temperature Range:	Ambient, -25° to 60°C (-13° to 140°F), output power reduced above 25°C
Ingress Protection Rating:	IP54
Enclosure Type:	3R
Maximum Altitude Rating:	10000ft
Conduit Knockouts:	Bottom and sides
Warranty:	5 years
Weight (lb/kg):	Unit: 16.0 / 7.3 Shipping: 19.75 / 8.9
Dimensions H × W × D (in/cm)*:	Unit: 23 × 8.8 × 6 / 58.4 × 22.4 × 15.2 Shipping: 26 × 12 × 10 / 66 × 30.5 × 25.4
Options:	Remote Temperature Sensor (RTS), HUB10.3, MATE3s
Certifications:	UL 1741, CSA C22.2 No. 107.1, IEC 62109-1
Minimum Battery Bank Size:	100Ah
Charging Range (Output):	20 to 68VDC
Additional Features:	Built-in and field replaceable arc fault circuit detection and interruption (AFCI), GFCI, and cooling fan

*Height includes fan, not pictured

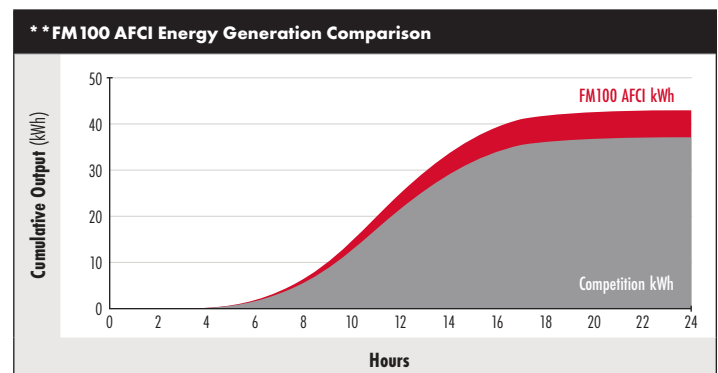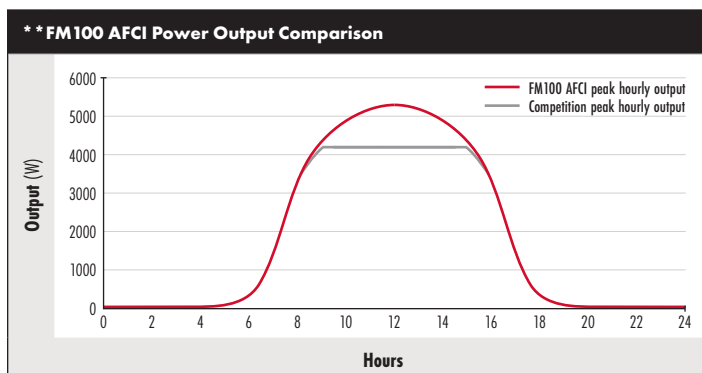

** These figures are based on Los Angeles solar production data.



an EnerSys® company

Alpha Technologies Services, Inc. 3767 Alpha Way, Bellingham, WA 98226
 Tel: +1 360 435 6030 Technical Support: +1 360 618 4363 Email: sales@outbackpower.com
 For more information visit: www.outbackpower.com

© 2021 EnerSys. All Rights Reserved. Trademarks and logos are the property of Alpha Technologies Services, Inc., EnerSys and its affiliates unless otherwise noted. Subject to revisions without prior notice. E. & O.E.

10/2021
 #980-00078-01-001 REV C